



More Productive
More competitive
Enhanced ROI



WELDING ROTATOR

BOLT TYPE
SELF-CENTERING
SELF ALLIGNED

Robologic

www.robologic.co.in

Key Features



High quality
Gear Reducers



Precision
Machined Surface



Heavy duty
Metal Body to
Enhance Durability



Metal Body
Remote Control



Reputed make
Control Elements
& Switchgears



SGI Gasting for
Bearing Housing
to Ensure Safety

UNLOCKING INNOVATION





- PTMEG PU RUBBER
- 90 SHORE A HARDNESS
- 15 MM PU THICKNESS
- HEAVY DUTY METAL ROLLER

Bolt Type Rotator




MODEL		RBTR-2	RBTR-5	RBTR-10	RBTR-20	RBTR-30	RBTR-40
RATED LOAD (Ton)		2	5	10	20	30	40
MIN JOB DIAMETER	A	200	250	320	500	550	600
MAX JOB DIAMETER	B	1800	2300	2800	3500	3800	4200
PU ROLLER OD	C	200	250	300	350	350	400
PU ROLLER WIDTH	D	80	100	120	120	130	140
METALIC ROLLER OD	E	170	220	270	320	320	370
LINEAR SPEED (mm/min)		100 -1000					
SPEED CONTROL		VFD					
MOTOR POWER (kw)		2x0.25	2x0.37	2x0.55	2x1.1	2x1.1	2x1.5
FRAME LENGTH	F	1400	1640	2050	2550	2720	3030
POWER WIDTH	G	390	490	555	580	620	620
IDLER WIDTH	H	325	340	370	450	470	470
TOTAL HEIGHT	I	365	445	515	610	640	655
BODY HEIGHT	J	118	147	147	175	175	179
CENTER DISTANCE OF ROLLER	K	215-1015	275-1275	335-1595	430-1970	540-2080	425-2405

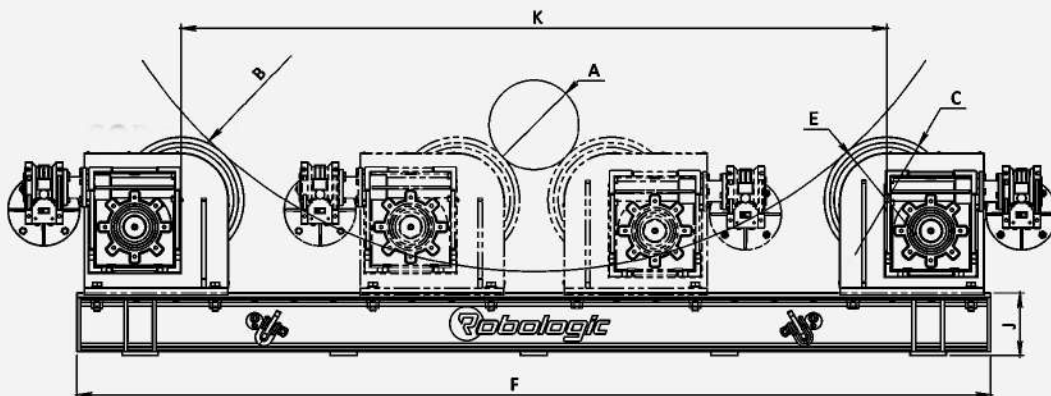

Self Centering Rotator (Screw Type)





MODEL		RSCR-2	RSCR-5	RSCR-10	RSCR-20	RSCR-30	RSCR-40
RATED LOAD (Ton)		2	5	10	20	30	40
MIN JOB DIAMETER	A	200	250	320	500	550	600
MAX JOB DIAMETER	B	1800	2300	2800	3500	3800	4200
PU ROLLER OD	C	200	250	300	350	350	400
PU ROLLER WIDTH	D	80	100	120	120	130	140
METALIC ROLLER OD	E	170	220	270	320	320	370
LINEAR SPEED (mm/min)		100 -1000					
SPEED CONTROL		VFD					
MOTOR POWER (kw)		2x0.25	2x0.37	2x0.55	2x1.1	2x1.1	2x1.5
FRAME LENGTH	F	1420	1670	2050	2600	2720	3030
POWER WIDTH	G	390	500	555	585	640	640
IDLER WIDTH	H	310	340	400	420	460	480
TOTAL HEIGHT	I	365	445	515	610	625	655
BODY HEIGHT	J	118	147	147	175	175	179
CENTER DISTANCE OF ROLLER	K	225-1030	285-1300	310-1550	425-1925	450-2075	500-2300

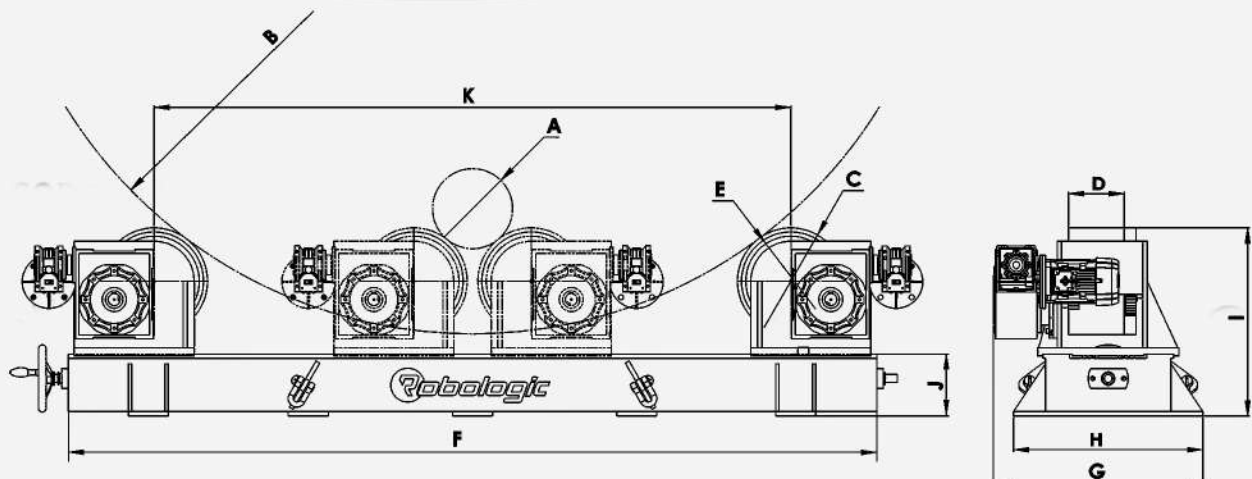

Self Aligned Rotator



MODEL		RSAR-5	RSAR-10	RSAR-20	RSAR-30	RSAR-40
RATED LOAD (Ton)		5	10	20	30	40
MIN JOB DIAMETER	A	250	320	450	450	600
MAX JOB DIAMETER	B	2300	2800	3500	3500	4200
PU ROLLER OD	C	250	300	350	350	400
PU ROLLER WIDTH	D	100	120	120	120	120
METAL ROLLER OD	E	240	290	340	340	390
METAL ROLLER WIDTH	D	15	25	30	30	40
LINEAR SPEED (mm/min)		100 - 1000				
SPEED CONTROL		VFD				
MOTOR POWER (kw)		0.75	1.1	1.5	2.2	3
POWER LENGTH	F	1520	1800	2180	2180	2500
POWER WIDTH	G	800	830	956	956	1145
IDLER LENGTH	H	1350	157	1910	1910	2170
IDLER WIDTH	I	420	420	486	486	530
TOTAL HEIGHT	J	648	800	933	933	1030

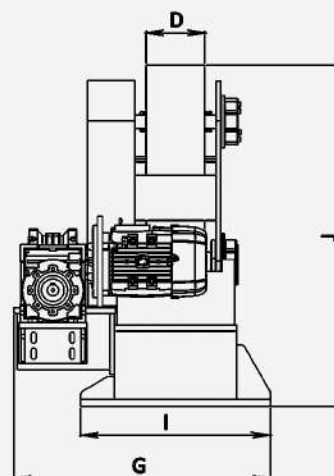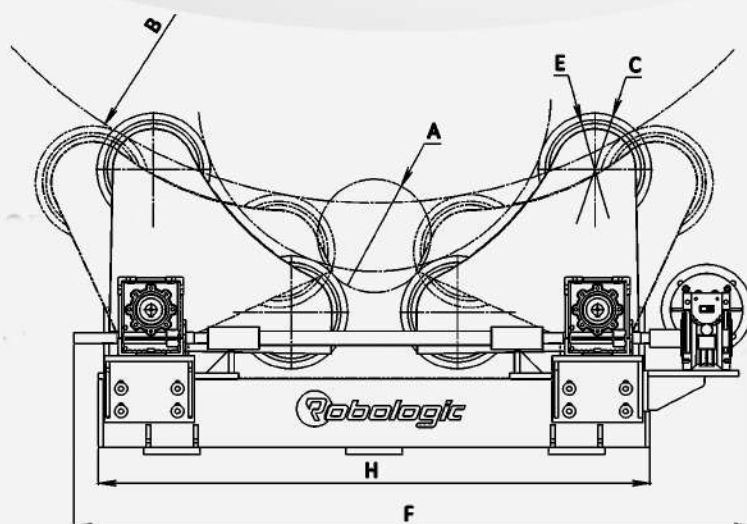

HEALTHY
WELD JOINT LEADS
SAFE HUMANITY

We reserve the right of modifying the technical features of machinery as stated herein.
All rights reserved. Text and images can be reproduced to improve product performance.



www.robologic.co.in

ROBOLOGIC INDIA PVT. LTD.

26-27, Krishna Industrial Park-3, Nr. Mahakali Temple,
Kubadthal, Ahmedabad, Gujarat, India 382430.

M: 9081811026 | 8980908106 | 9081811006

E: sales@robologic.co.in

